

SCG Rustic

Lap Siding, Board, Eave Liner



RUSTIC

(series)

makes UNIQUE

Make a unique design that shows your character with **SCG Rustic** a beautiful and realistic wood substitute product.

- Deep wood grain design that stays defined even when painted
- Suitable for both wall and ceiling application to create harmony in the space


Make it possible for you to create a creative design and outstanding.



SCG Rustic Lap Siding

SCG Lap Siding Rustic Series

- Trapezoid shaped grooves  exclusively for SCG Rustic
Neat and beautiful. Stain-free.
- Suitable for both interior and exterior application.




Dimensions Width x Length x Thickness (cm)	Weight (kg/piece)	Usage (pieces/sq m)
23.6 x 300 x 1	9.4	1.54

SCG Rustic Board



SCG Board Rustic Lining Splinter

- Different with beveled edge, make space lining jointing more seamless.
- Exterior wall decoration (8 mm thick series), less jointing with longer panel.
- Interior wall and ceiling (6 mm thick series).




Dimensions Width x Length x Thickness (cm)	Weight (kg/piece)	Usage (piece/sq m)
120 x 240 x 0.6	25.69	0.35
120 x 280 x 0.8	40.1	0.30



SCG Rustic Eave Liner

SCG Eaves Liner Rustic Series

- Beautiful and neat with 2 sides tapered edges
- Applicable for eaves liner or shading panels.






Dimensions Width x Length x Thickness (cm)	Weight (kg/piece)	Usage (pc/sq m)
7.5 x 300 x 0.8	2.7	4.44



SCG decorative wall panels and eave liners Rustic Series Installation Guide

SCG Lap Siding Rustic Series Installation Guide



Start installing from the bottom first. Turn the lap siding side upwards. Fix a screw about 12 mm from the top edge.

- For galvanized frame, fix with 23 mm needle point screw.
- For steel frame, fix with 28.5 mm self-drilling wing screw.
- For concrete wall, fix with 38 mm needle point screw and 37 mm plastic anchor.

Place the next panel on top by placing it above the gap of the below panel. For exterior installation where there is wind load, it is recommended to fix the screws at least 3 cm from the bottom edge.


For jointing and cornering panels, it is recommended to cut 45-degree angle and leave 2-3 mm space and seal with SCG Acrylic Sealant, and also use SCG PU sealant for outdoor application to prevent water leakage. The top panel should also be covered with flashing to prevent water leakage from the top.

Remark • For exterior application, waterproofing membrane should be installed before installing the lap siding.
• For the bottom panel, a piece of materials should be used to support the bottom area to prevent any damage during installation.

SCG Board Rustic Lining Splinter Installation Guide




Installing on a frame.

Frame span maximum 40 cm



Installing on a concrete wall


Fixing line width should not exceed 60 cm



Galvanized frame, fix with 23 mm needle point screw. Steel frame, fix with 32 mm self-drilling wing screw. Concrete wall, fix with 37 mm plastic anchor and 38 mm needle point screw. Fix screw 5 cm from the corner and at least 1.2 cm from the edge. Fix next screw every 20 cm. Install with space lining jointing, leave 3-4 mm between panels and seal the joint with SCG PU.


SCG Smartboard Ceiling Rustic Series

Installation Guide

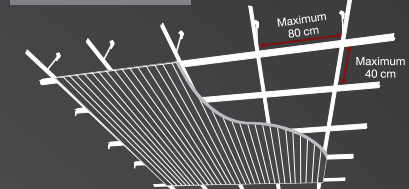


Install main frame with span maximum 80 cm and sub frame span maximum 40 cm. Fix the panels to the galvanized frame with 23 mm needle point screw. Fix to steel frame with 32 mm self-drilling wing screw. The fixing distance from the corner should be 5 cm and at least 1.2 cm from the edge. Fix next screw every 20 cm. Install with space lining jointing, leave 3-4 mm between panels and seal the joint with SCG PU.


SCG Eaves Liner Rustic Series Installation Guide



Install main frame with maximum span 80 cm and sub frame with maximum 40 cm.




Inset net should be installed before installing eaves liner to prevent insects from entering the house.



For galvanized frame, fix with 23 mm needle point screw.

For steel frame, fix with 28.5 mm self-drilling wing screw with at least 2.5 cm space from the edge. Install the screws every frame span. Install the next panel by leaving about 1 cm gap between panels.

Screw Head Sealing

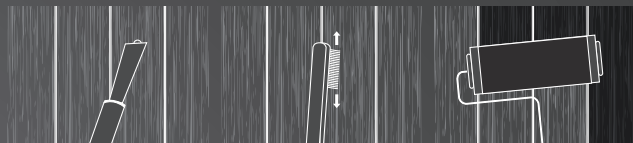

Clean the screw head area and use acrylic filler or wall putty to conceal 1-2 times. Leave to dry for 1-2 hours before using no.3 sandpaper to smoothing.

In case a wood grain design is desired, use copper brush to gently scrub on the screw head area along wood grain direction to create the design.

Apply 1 layer of primer and 1-2 layers of the desired paints. Use 100% water-based acrylic paint or fiber cement paint.



- WARNING** • Never use as a structure for buildings, support, or other purposes. SCG Smartwood/ SCG D'COR must be installed in compliance with the installation manual, and only standardized equipment from the manufacturer can be used. • Never ingest or swallow. Furthermore, the dust from cutting, grinding, drilling the product should not be inhaled. • Do not use in areas that are wet or damp all times. • Do not use for the floor installed higher than 50 cm from the ground.
- CAUTION** • The products of SCG Smartwood / SCG D'COR are designed for working condition in Thailand. Any application or usage outside Thailand must follow and is considered to be responsibility of projects' architect, designer, construction supervisor and installer. • Wood stain products contain chemical substance and cannot be swallowed, ingested or come into contact with the eyes. • While working use standardized personal safety equipment; tightly close containers after work and keep away from the hands of children. • If any skin irritation occurs with contact, hurry to rinse with water many times and see a doctor without delay. • If swallowed or ingested, do not induce vomiting. Drink plenty of clean water in order to dilute the chemical and see a doctor immediately. • Specifications for installation are only preliminary suggestions for general usage. The installation methods and structures used should be considered in the EIT Standard 1015-40 for Steel Structured Buildings and the design specifications in Ministerial Regulations, 6th Edition (1984) issued pursuant to the tenets of the Act of 1977. • Using the products outside of the usage specified in this document is considered a direct responsibility of the construction designer and controller. • The installation manual is subject to change. Construction designers, controllers and installers must check to determine whether the installation manual in their possession is the most recent edition. If there is any doubt, the edition can be checked at www.scgbuildingmaterials.com

CW-OT-E-C009/6412 *The color of the products shown in this document is for promotional proposes only and may differ due to the printing process. It is recommended to see the actual color at the retailer before making purchase decision.

All Content, design and layout are Copyright © 2021, SCG Cement-Building Materials All Right Reserved, Reproduction in whole or part in any form or medium without specific written permission is prohibited



Email : contact@scg.com, www.scgbuildingmaterials.com

SCG Rustic

Lap Siding, Board, Eave Liner



- WARNING** • Never use as a structure for buildings, support, or other purposes. SCG Smartwood/ SCG D'COR must be installed in compliance with the installation manual, and only standardized equipment from the manufacturer can be used. • Never ingest or swallow. Furthermore, the dust from cutting, grinding, drilling the product should not be inhaled. • Do not use in areas that are wet or damp all times. • Do not use for the floor installed higher than 50 cm from the ground.
- CAUTION** • The products of SCG Smartwood / SCG D'COR are designed for working condition in Thailand. Any application or usage outside Thailand must follow and is considered to be responsibility of projects' architect, designer, construction supervisor and installer. • Wood stain products contain chemical substance and cannot be swallowed, ingested or come into contact with the eyes. • While working use standardized personal safety equipment; tightly close containers after work and keep away from the hands of children. • If any skin irritation occurs with contact, hurry to rinse with water many times and see a doctor without delay. • If swallowed or ingested, do not induce vomiting. Drink plenty of clean water in order to dilute the chemical and see a doctor immediately. • Specifications for installation are only preliminary suggestions for general usage. The installation methods and structures used should be considered in the EIT Standard 1015-40 for Steel Structured Buildings and the design specifications in Ministerial Regulations, 6th Edition (1984) issued pursuant to the tenets of the Act of 1977. • Using the products outside of the usage specified in this document is considered a direct responsibility of the construction designer and controller. • The installation manual is subject to change. Construction designers, controllers and installers must check to determine whether the installation manual in their possession is the most recent edition. If there is any doubt, the edition can be checked at www.scgbuildingmaterials.com

CW-OT-E-C009/6412 *The color of the products shown in this document is for promotional proposes only and may differ due to the printing process. It is recommended to see the actual color at the retailer before making purchase decision.

All Content, design and layout are Copyright © 2021, SCG Cement-Building Materials All Right Reserved, Reproduction in whole or part in any form or medium without specific written permission is prohibited



RUSTIC
makes UNIQUE
(series)

Make a unique design that shows your character with SCG Rustic a beautiful and realistic wood substitute product.
• Deep wood grain design that stays defined even when painted
• Suitable for both wall and ceiling application to create harmony in the space
Make it possible for you to create a creative design and outstanding.




SCG Lap Siding Rustic Series

- Trapezoid shaped grooves exclusively for SCG Rustic. Neat and beautiful. Stain-free.
- Suitable for both interior and exterior application.



Table with 3 columns: Dimensions Width x Length x Thickness (cm), Weight (kg/piece), Usage (pieces/sq m). Row 1: 23.6 x 300 x 1, 9.4, 1.54

SCG Rustic Lap Siding



SCG Eaves Liner Rustic Series

- Beautiful and neat with 2 sides tapered edges
- Applicable for eaves liner or shading panels.







Table with 3 columns: Dimensions Width x Length x Thickness (cm), Weight (kg/piece), Usage (pc/sq m). Row 1: 7.5 x 300 x 0.8, 2.7, 4.44



SCG decorative wall panels and eave liners Rustic Series Installation Guide

SCG Lap Siding Rustic Series Installation Guide




Start installing from the bottom first. Turn the lap siding side upwards. Fix a screw about 12 mm from the top edge.
- For galvanized frame, fix with 23 mm needle point screw.
- For steel frame, fix with 28.5 mm self-drilling wing screw.
- For concrete wall, fix with 38 mm needle point screw and 37 mm plastic anchor.
Place the next panel on top by placing it above the gap of the below panel. For exterior installation where there is wind load, it is recommended to fix the screws at least 3 cm from the bottom edge.
For jointing and cornering panels, it is recommended to cut 45-degree angle and leave 2-3 mm space and seal with SCG Acrylic Sealant, and also use SCG PU sealant for outdoor application to prevent water leakage. The top panel should also be covered with flashing to prevent water leakage from the top.
Remark • For exterior application, waterproofing membrane should be installed before installing the lap siding.
• For the bottom panel, a piece of materials should be used to support the bottom area to prevent any damage during installation.

SCG Board Rustic Lining Splinter Installation Guide


Installing on a frame.

Frame span maximum 40 cm



Installing on a concrete wall


Fixing line width should not exceed 60 cm

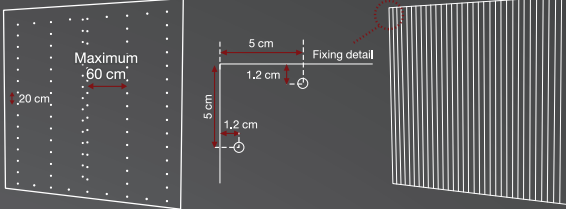

Galvanized frame, fix with 23 mm needle point screw. Steel frame, fix with 32 mm self-drilling wing screw. Concrete wall, fix with 37 mm plastic anchor and 38 mm needle point screw. Fix screw 5 cm from the corner and at least 1.2 cm from the edge. Fix next screw every 20 cm. Install with space lining jointing, leave 3-4 mm between panels and seal the joint with SCG PU.


SCG Smartboard Ceiling Rustic Series

Installation Guide

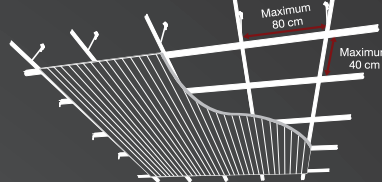


Install main frame with span maximum 80 cm and sub frame span maximum 40 cm. Fix the panels to the galvanized frame with 23 mm needle point screw. Fix to steel frame with 32 mm self drilling wing screw. The fixing distant from the corner should be 5 cm and at least 1.2 cm from the edge. Fix next screw every 20 cm. Install with space lining jointing, leave 3-4 mm between panels and seal the joint with SCG PU.


SCG Eaves Liner Rustic Series Installation Guide



Install main frame with maximum span 80 cm and sub frame with maximum 40 cm.





Insect net should be installed before installing eaves liner to prevent insects from entering the house.



For galvanized frame, fix with 23 mm needle point screw. For steel frame, fix with 28.5 mm self-drilling wing screw with at least 2.5 cm space from the edge. Install the screws every frame span. Install the next panel by leaving about 1 cm gap between panels.

Screw Head Sealing



Clean the screw head area and use acrylic filler or wall putty to conceal 1-2 times. Leave to dry for 1-2 hours before using no.3 sandpaper to smoothing.

In case a wood grain design is desired, use copper brush to gently scrub on the screw head area along wood grain direction to create the design.

Apply 1 layer of primer and 1-2 layers of the desired paints. Use 100% water-based acrylic paint or fiber cement paint.

SCG Rustic Board



SCG Board Rustic Lining Splinter

- Different with beveled edge, make space lining jointing more seamless.
- Exterior wall decoration (8 mm thick series), less jointing with longer panel.
- Interior wall and ceiling (6 mm thick series).



Table with 3 columns: Dimensions Width x Length x Thickness (cm), Weight (kg/piece), Usage (piece/sq m). Row 1: 120 x 240 x 0.6, 25.69, 0.35. Row 2: 120 x 280 x 0.8, 40.1, 0.30

